

SWIT®

标准宝荣卡口 直播间太阳灯

BL- 系列



BL-150E

150W 一体式, 仅AC供电



BL-200

200W 分体式, AC及双电池供电



BL-300

300W 分体式, AC及双电池供电



高亮COB集成LED灯芯


5600K日光型色温

	1米	3米	5米	
BL-150E	裸灯	4400Lux	570 Lux	240Lux
	带标准罩	27290Lux	3550Lux	1470Lux
BL-200	裸灯	5900Lux	770Lux	320Lux
	带标准罩	38000Lux	4940Lux	2050Lux
BL-300	裸灯	12100Lux	1570Lux	650Lux
	带标准罩	54000Lux	7020Lux	2910Lux



CRI 97; TLCI 98

高显指, 颜色不失真



Sector	Lightness	Chroma	Hue
R	0	0	0
R/Y	0	0	0
Y/G	0	0	0
G	0	0	+
G/C	0	0	+
C/B	0	0	0
B	0	0	-
B/M	0	0	+
M	0	0	+
M/R	0	0	+



预设9种模拟灯效

支持照度及灯效频率调节



闪电1



闪电2



荧幕



烛光



闪光灯



频闪



远/近光灯



双跳



呼吸



接口及操控面板

5芯DMX输入/输出



BL-150E



BL-200 / 300 控制盒




蓝牙APP控制

Android




加灯/分组

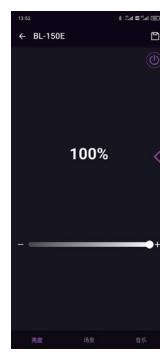

照度调节



选择灯效

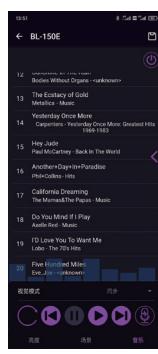

音乐节奏同步



宝荣口灯罩
选购配件

SWIT®



BA-OCT36
90cm/36寸易撑型八角柔光箱
带双层柔光布



BA-LAN26
65cm/26寸易撑型灯笼罩柔光箱



BA-PARA26
70cm/26寸易撑型深抛柔光箱
带格栅及双层柔光布



BA-BD16
40cm/16寸雷达反光罩
带40°金属蜂窝片及柔光布



BA-ST3
3.1寸束光筒
带25° 和30°金属蜂窝片及5个滤色片



BA-F3X
12-40° 3x变焦菲涅尔透镜聚光筒
带10个滤色片



技术参数

型号	BL-150E	BL-200	BL-300
LED	150W COB-LED	200W COB-LED	300W COB-LED
照度	27290Lux @ 1米 (带标准罩)	38000Lux @ 1米 (带标准罩)	54000Lux @ 1米 (带标准罩)
色温	5600K	5600K	5600K
显色指数	CRI 97; TLCI 98	CRI 97; TLCI 98	CRI 97; TLCI 98
DMX	5芯 DMX512 输入/输出	5芯 DMX512 输入/输出	5芯 DMX512 输入/输出
输入电压	AC 100-240V (PowerCON)	AC 100-240V (PowerCON),电池11-17V	AC 100-240V (PowerCON),电池11-17V
尺寸	272×199×333mm	灯头 272×199×333mm 控制盒 170×125×218mm	灯头 301×199×333mm 控制盒 170×125×218mm
重量	2.15kg	灯头 1.8kg; 控制盒 1.9kg	灯头 2.5kg; 控制盒 1.9kg



微信订阅号



微信视频号



抖音号